

FRENO LINKBOLT





180°

Pivots 180° from the surface

Rotates 360° around its axis

Safe lifting


Suitable for side-lifting, raising and turning a load safely.





Higher capacity

WLL is 3 times higher than normal eyebolts. (Freno A type)





Customizable


- Long/Short bolts
- Coarse/Fine thread
- Metric/Imperial bolts
- Electroless nickel plating
- · Seat washer etc



Warning!! Side-lifts with conventional eyebolts are prohibited in many countries.

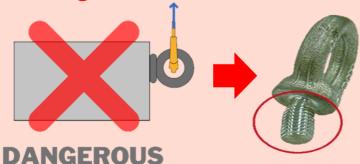





And many restrictions on using conventional eyebolts...

${ { { \mathbb f Safety, Labor \ Efficiency, Convenience } \mathbb J } }$

We provide genuine quality in pursuit


ROTARY EYEBOLT



360°



Pivots 180° from the surface



SAFE SIDE LIFT

Safe lifting

suitable for side-lifting a load safely.

Higher capacity

WLL is 2.5 times higher than normal eyebolts.

customizable

Long bolts are available on customer's request.

SIZE LINEUP



Freno A type

Bolt size: M8~M48 WLL: 0.3~15ton



Freno B type

Bolt size: M24~M100 WLL: 0.95~20.0ton

| 2 |
|---|
| |
| |

RE bolt

Bolt size: M8~M48 WLL: 0.2~10.0ton

| Item | WLL (t) | Bolt Size | Weight (kg) |
|-------|------------|--------------|----------------|
| A-8 | 0.3 | M8 | 0.25 |
| A-10 | 0.5 | M10 | 0.26 |
| A-12 | 0.8 | M12 | 0.81 |
| A-14 | 1.2 | M14 | 0.83 |
| A-16 | 1.6 | M16 | 0.85 |
| A-18 | 2.3 | M18 | 2.6 |
| A-20 | 2.8 | M20 | 2.6 |
| A-22 | 3.1 | M22 | 2.7 |
| A-24 | 3.7 | M24 | 2.7 |
| A-27 | 5.0 | M27 | 7.1 |
| A-30 | 6.3 | M30 | 7.2 |
| A-33 | 7.0 | M33 | 7.3 |
| A-36 | 8.0 | M36 | 7.6 |
| A-42 | 10.0 | M42 | 13.2 |
| A-48 | 12.0 | M48 | 13.8 |
| A-48L | 15.0 | M48 | 15.6 |

| Item | WLL (t) | Bolt Size | Weight (kg) |
|--------|------------|--------------|----------------|
| B-24 | 0.95t | M24 | 0.95 |
| B-30 | 1.5t | M30 | 1.1 |
| B-36 | 2.3t | M36 | 3.1 |
| B-42 | 3.4t | M42 | 3.4 |
| B-48 | 4.3t | M48 | 3.7 |
| B-64 | 9.0t | M64 | 9.6 |
| BB-64 | 15.0 | M64 | 17.4 |
| B-80 | 15.0 | M80 | 19.2 |
| B-100 | 15.0 | M100 | 23.1 |
| MB-64 | 20.0 | M64 | 27.1 |
| MB-80 | 20.0 | M80 | 29.0 |
| MB-100 | 20.0 | M100 | 32.7 |

| Item | WLL (t) | Bolt Size | Weight (kg) |
|--------|------------|--------------|----------------|
| RE-8A | 0.2 | M8 | 0.18 |
| RE-10A | 0.3 | M10 | 0.18 |
| RE-12A | 0.6 | M12 | 0.25 |
| RE-16A | 1.2 | M16 | 0.4 |
| RE-20A | 2.0 | M20 | 0.7 |
| RE-24A | 2.6 | M24 | 1.0 |
| RE-30 | 4.0 | М30 | 2.1 |
| RE-36 | 6.0 | M36 | 3.5 |
| RE-42 | 7.5 | M42 | 5.1 |
| RE-48 | 10.0 | M48 | 8.0 |



(NOTE)RE-A (M8~24) is bolthead less type.

Siam Martec Sales Co., Ltd.

129/1 Moo 17 Soi Winner, Teparak Rd. T. Bangsaothong, A. Bangsaothong, Samutprakam 10570, THAILAND

TEL: +66-(0)2-330-3568 FAX: +66-(0)2-330-3569 E-mail: salescosms@gmail.com LINE ID: 0829469542

Inquire information or question